


09AHHD2434A

Height(mm)	800		
Light Source	24x0.2W		
Input Voltage(V)	DC 24 AC 120 240		
Operating Current(MA)	24V=200	120V=80	240V=50
Consumption(W)	24V=4.8	120V=6	240V=6.1
Luminance(LM)	VVV=300		
IK	07		

Linear Drawing

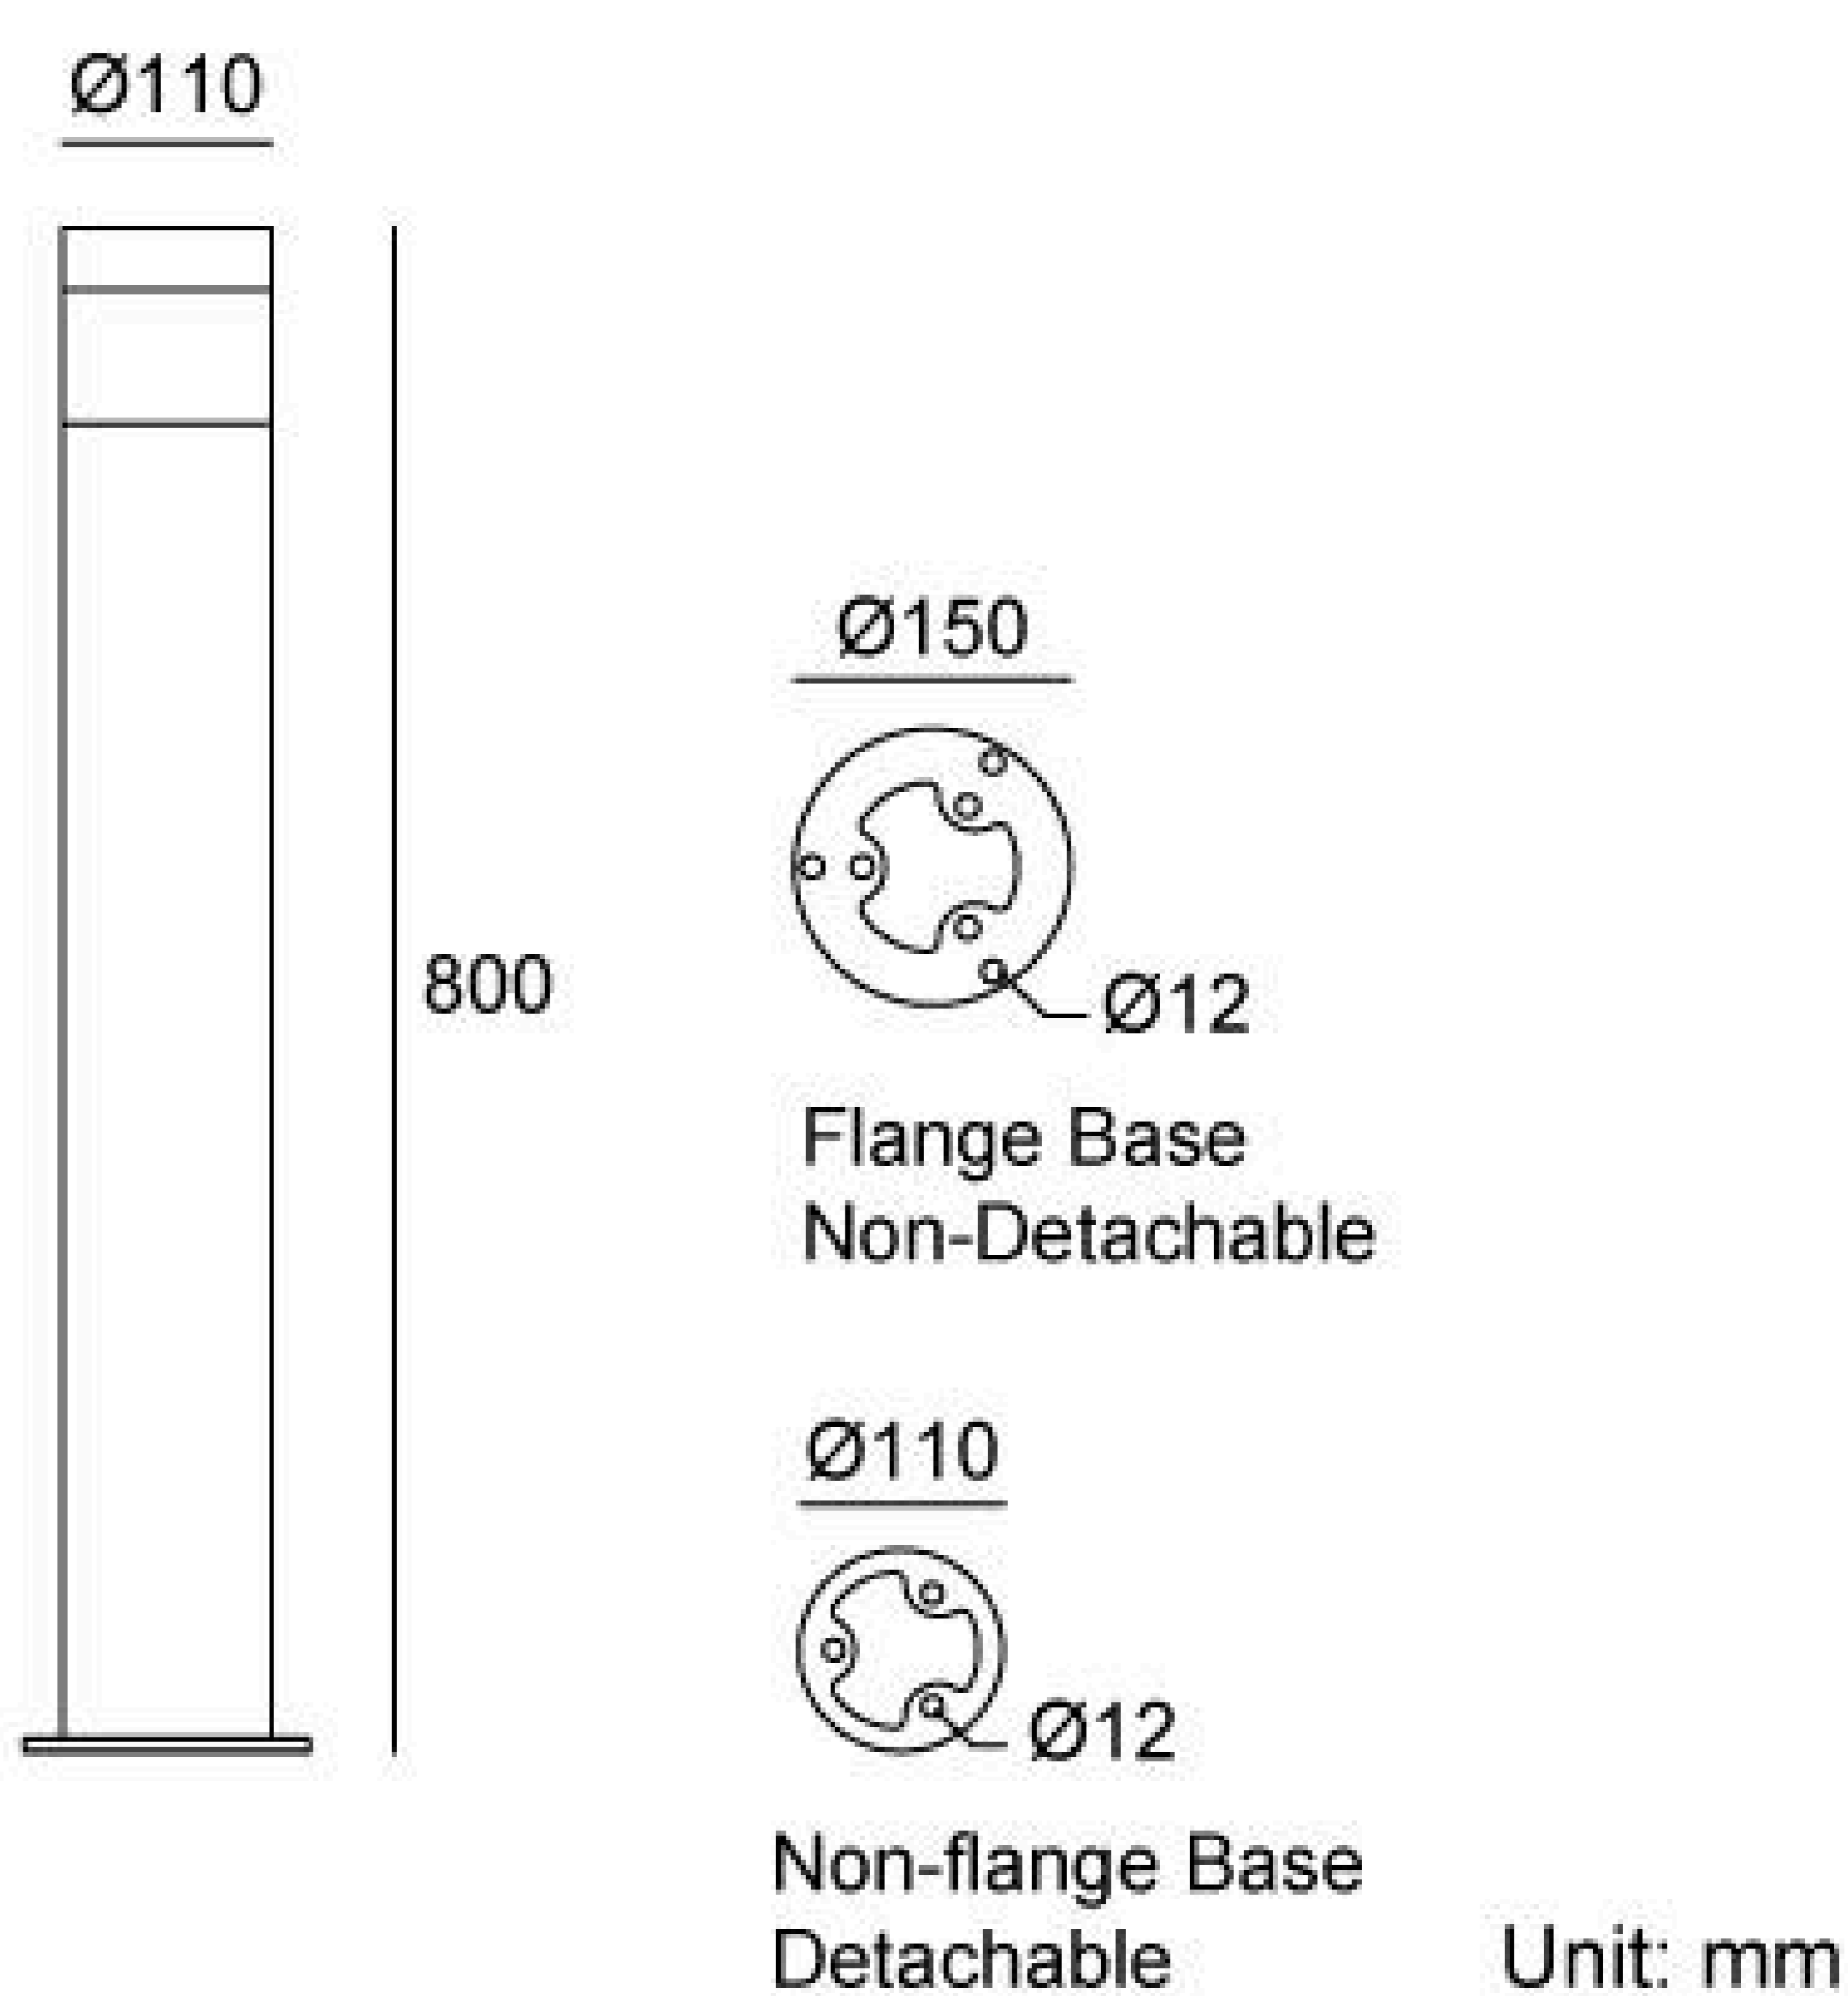

Specification

Housing	12# Die-casting aluminum powder coated. T=60-80µm Adhesion of ISO class 1/ASTM class 4B
Light Window	PMMA
LED Type	SMD
LED Driver	Built in on/off driver
Operating Temperature	-20°C~40°C
Power Cable	Outside of luminaire (Without waterstopper) 24V: H05RN-F 2×1.0mm², L=0.5m 120V/240V: H05RN-F 3×1.0mm², L=0.5m
Base	Flange base
Dimming Support	External DALI supported TRIAC,0-10V, PWM via external driver on request

Painting Color

Primary		Sanded Black RAL 9005
Secondary		Sanded Dark Grey KAP 7037
		Sanded Bronze KAP 7008

Modular Light Source and Power with IP-66



- 1 IP66 light source module with pc cover
- 2 IP66 built-in power module
- 3 IP67 cable gland



Base Options

Source Mounting Base	Inground Base (Optional)	Ground Anchor Base (Optional)
 Ø150 Ø12 Type A Flange Base Non-Detachable	 JC3001 Ø160 Ø90 177 210 258	 22A Ø150 250 Installation steps (Optional)
 Ø110 Ø12 Type B Non-flange Base Detachable	 JC3002 Ø120 Ø50 177 210 211	 25A Ø110 250 Installation steps (Optional)

Photometric

