

09AKLD4234A

Height (mm)	300
Light Source	42x0.2W
Input Voltage (V)	DC 24 AC 120 240
Operating Current (MA)	24V=415 120V=73 240V=38
Consumption (W)	24V=10 120V=8.6 240V=8.2
Luminance (LM)	CW=450 WW=350
IK	05


Specification

Housing	12# Die-casting aluminum powder coated. T=60-80μm Adhesion of ISO class 1/ASTM class 4B
Light Window	PMMA
LED Type	SMD
LED Driver	Built in on/off driver
Operating Temperature	-20°C~40°C
Power Cable	Outside of luminaire (Without waterstopper) 24V: H05RN-F 2×1.0mm², L=0.5m 120V/240V: H05RN-F 3×1.0mm², L=0.5m
Base	Flange base
Dimming Support	External DALI supported TRIAC,0-10V, PWM via external driver on request


Modular Light Source and Power with IP-66



Linear Drawing

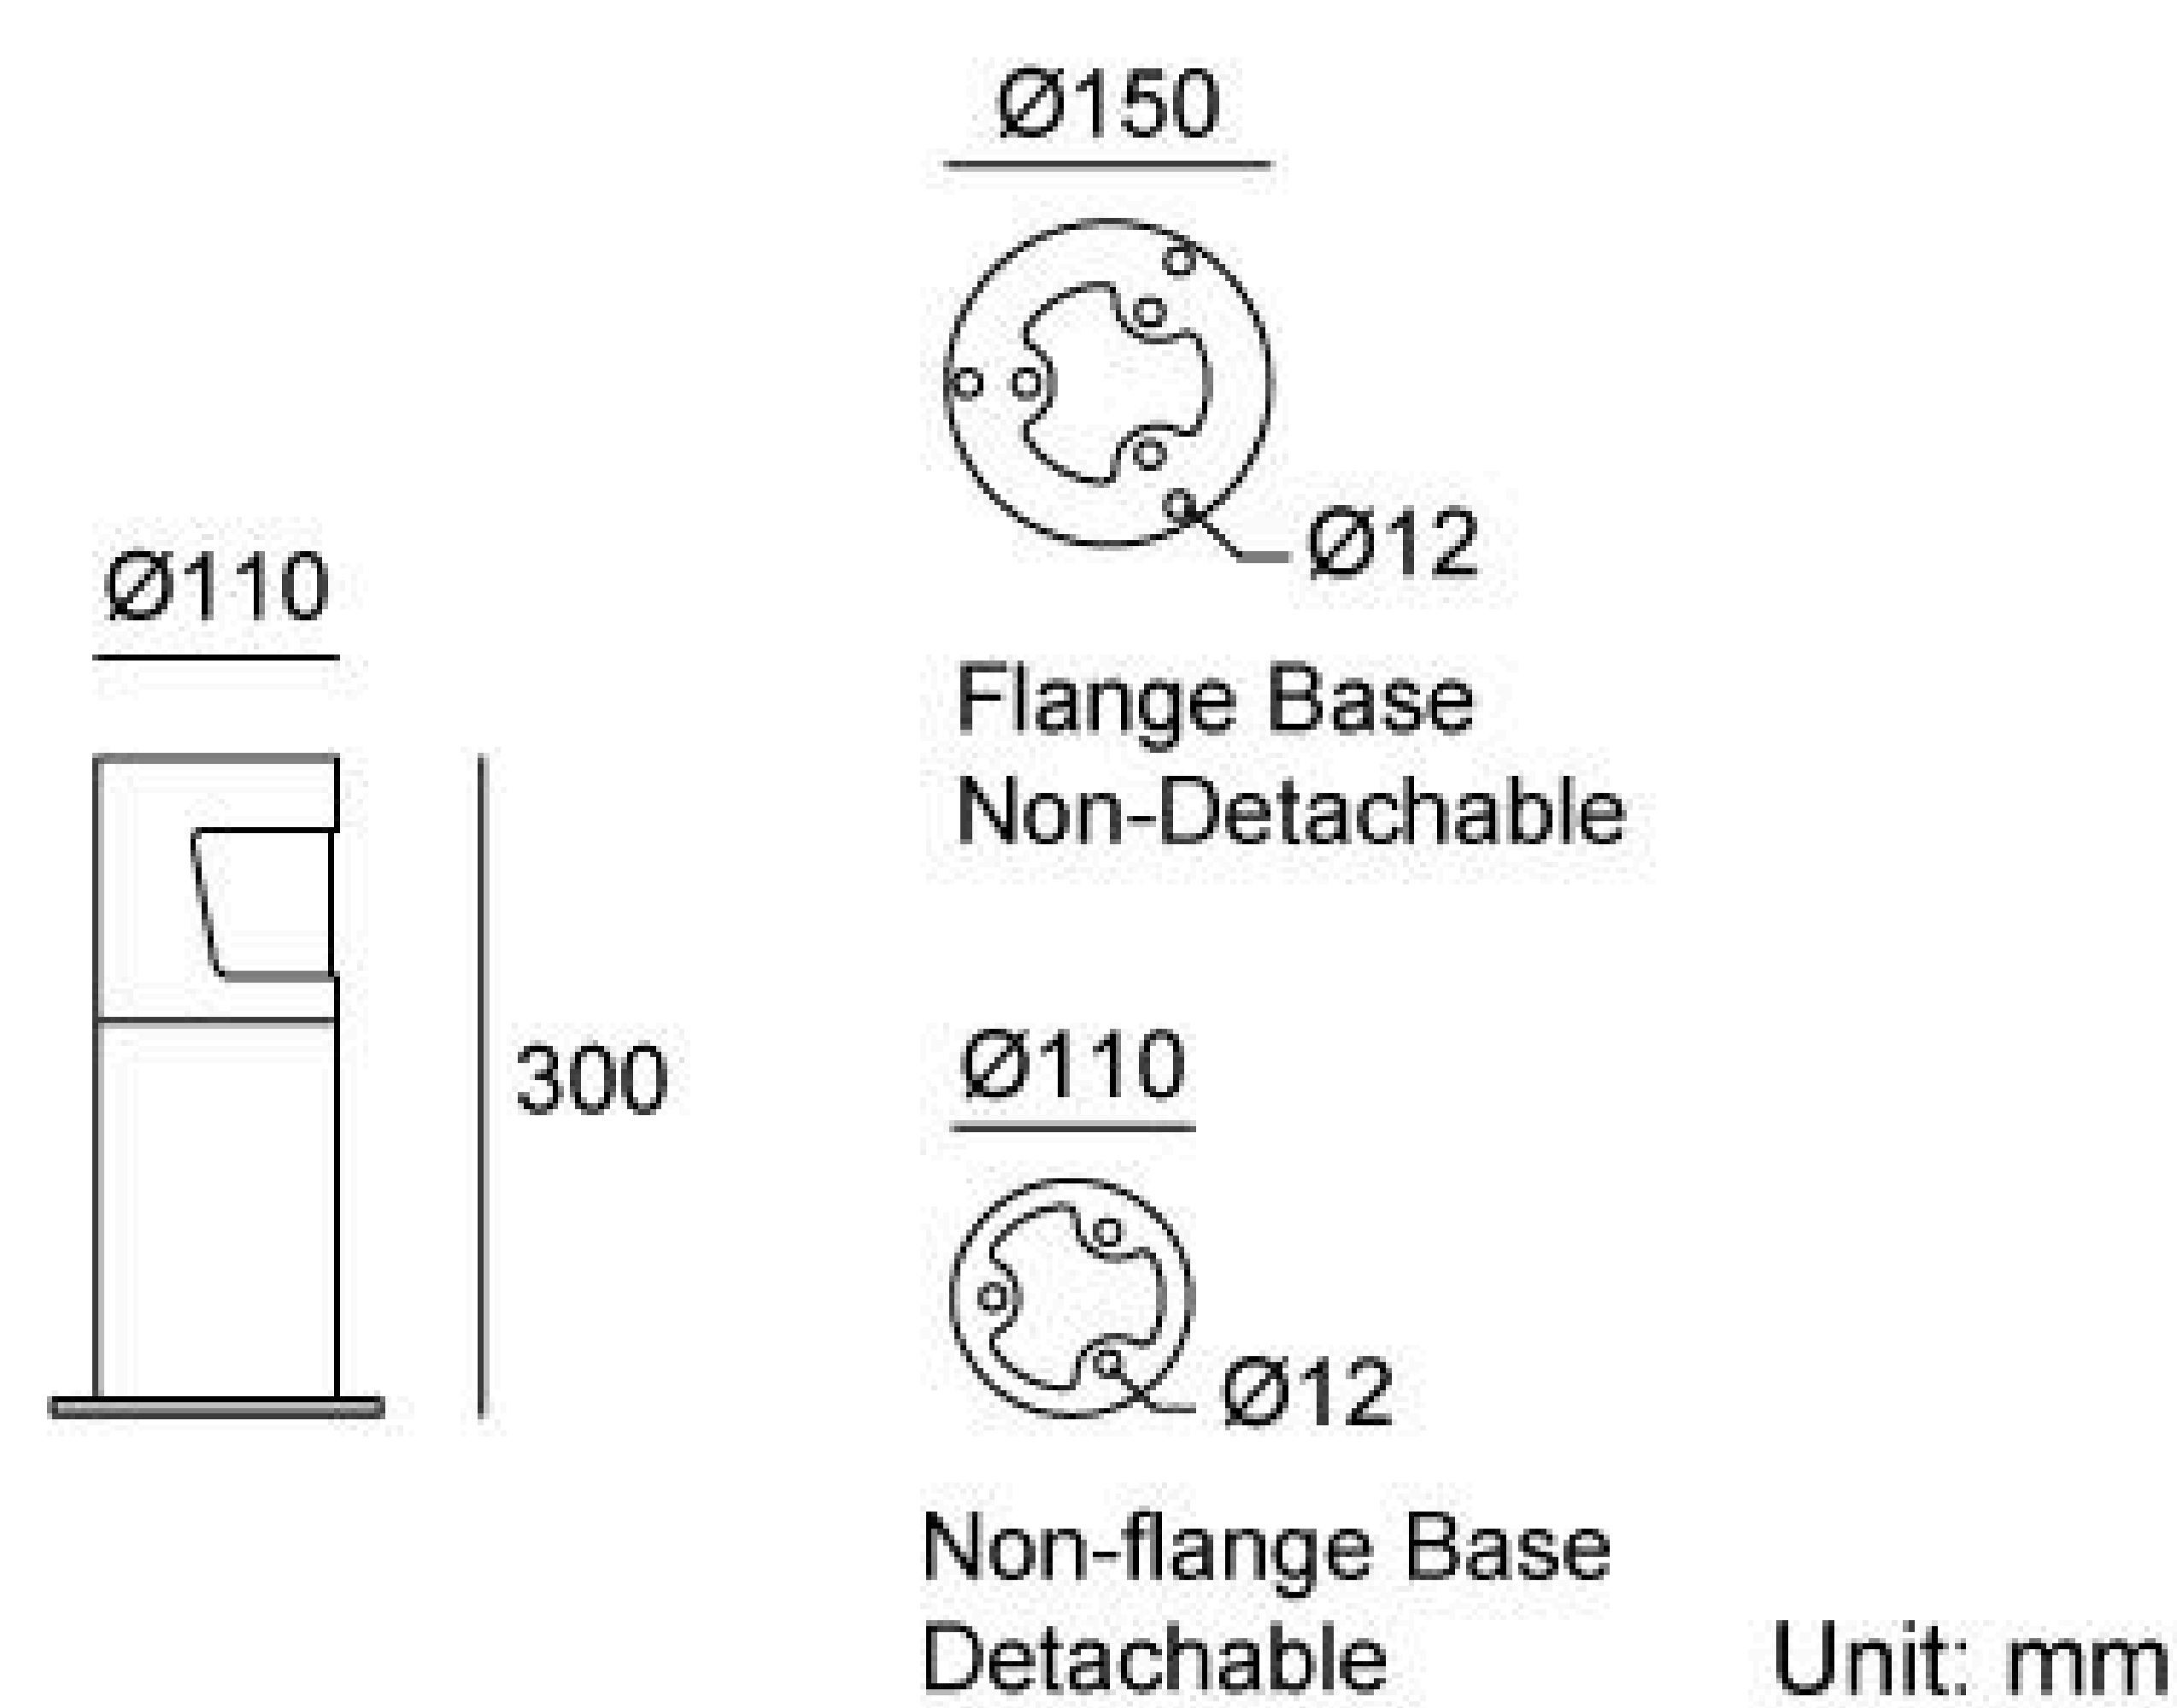

Painting Color

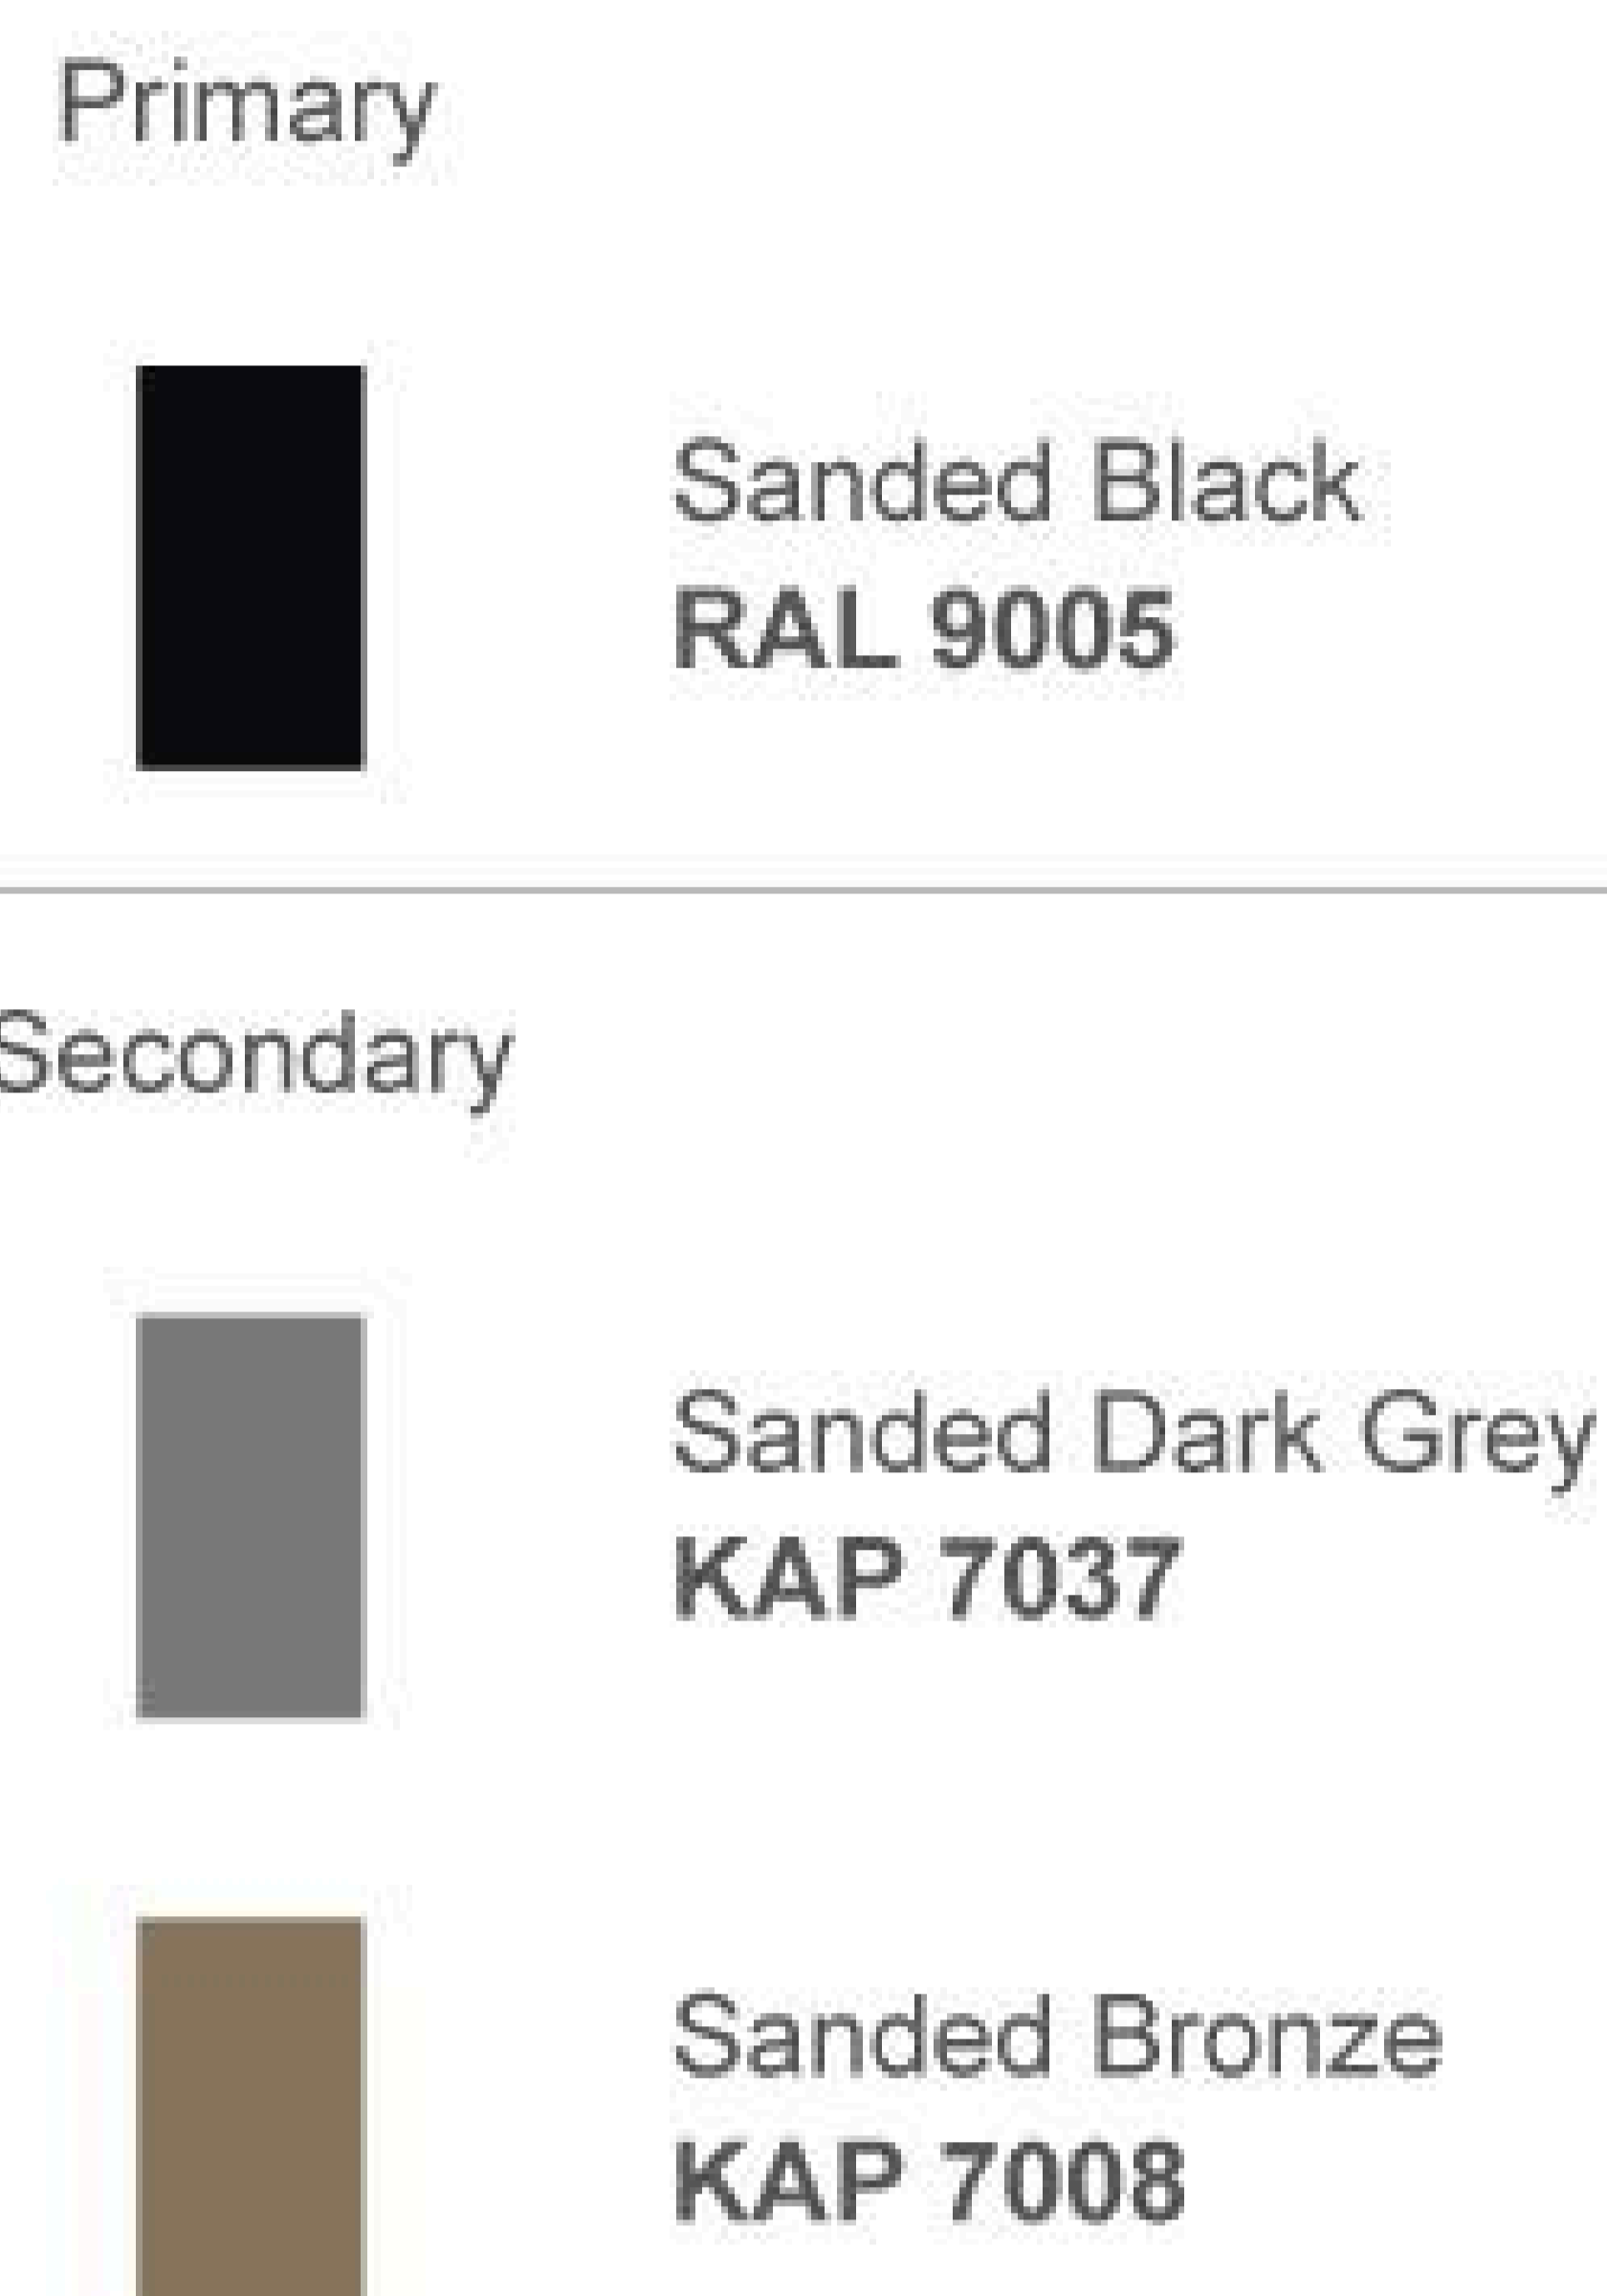

Base Options

Source Mounting Base	Inground Base (Optional)	Ground Anchor Base (Optional)
<p>Ø150 Ø12 Type A Flange Base Non-Detachable</p>	<p>JC3001 Ø160 Ø90 177 210 258</p>	<p>22A Ø150 250 Installation steps (Optional)</p>
<p>Ø110 Ø12 Type B Non-flange Base Detachable</p>	<p>JC3002 Ø120 Ø50 177 210 211</p>	<p>25A Ø110 250 Installation steps (Optional)</p>

Photometric

