


07GPD0656 (TWO SIDE)

Linear Drawing


Light Source	6x1W
Selected Degree (°)θ1/2	80° x 55°
Input Voltage (V)	AC 240
Operating Current (MA)	240V=37
Consumption (W)	240V=8
Luminance (LM)	WW=191x2
IK	06

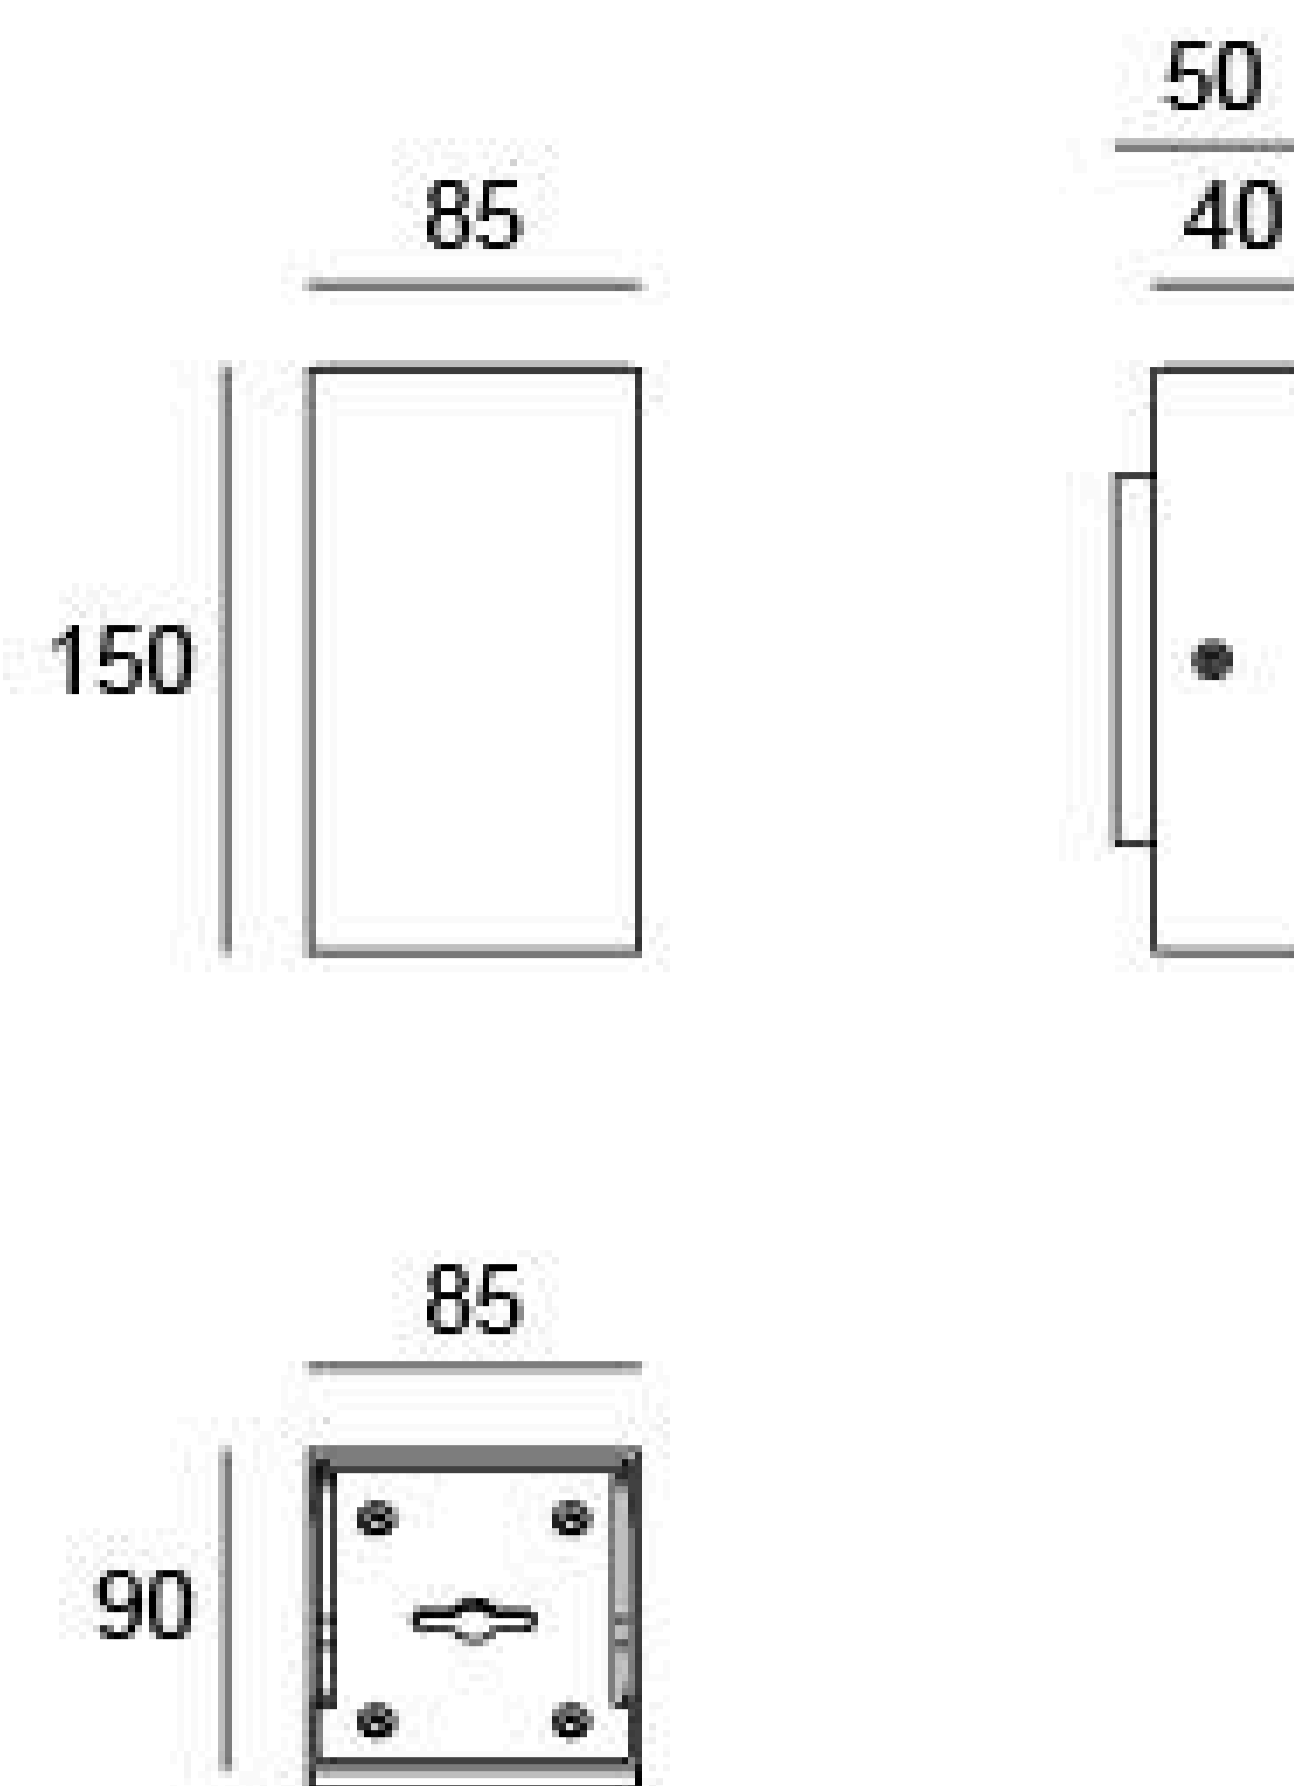

Unit: mm

Specification

Housing	12# Die-casting aluminum powder painting T=60-80µm.Adhesion of ISO class 1/ASTM class 4B
Light Window	Tempered frosted glass T=4mm
Gasket	Waterproof silicone gasket
Driver	Built in on/off driver
LED Type	SMD
Operating Temperature	-20°C-40°C
Power Cable	Outside of luminaire (Without waterstopper) 240V: H05RN-F 3×1.0mm², L=0.3m
Dimming Support	External DALI supported TRIAC,0-10V, PWM via external driver on request

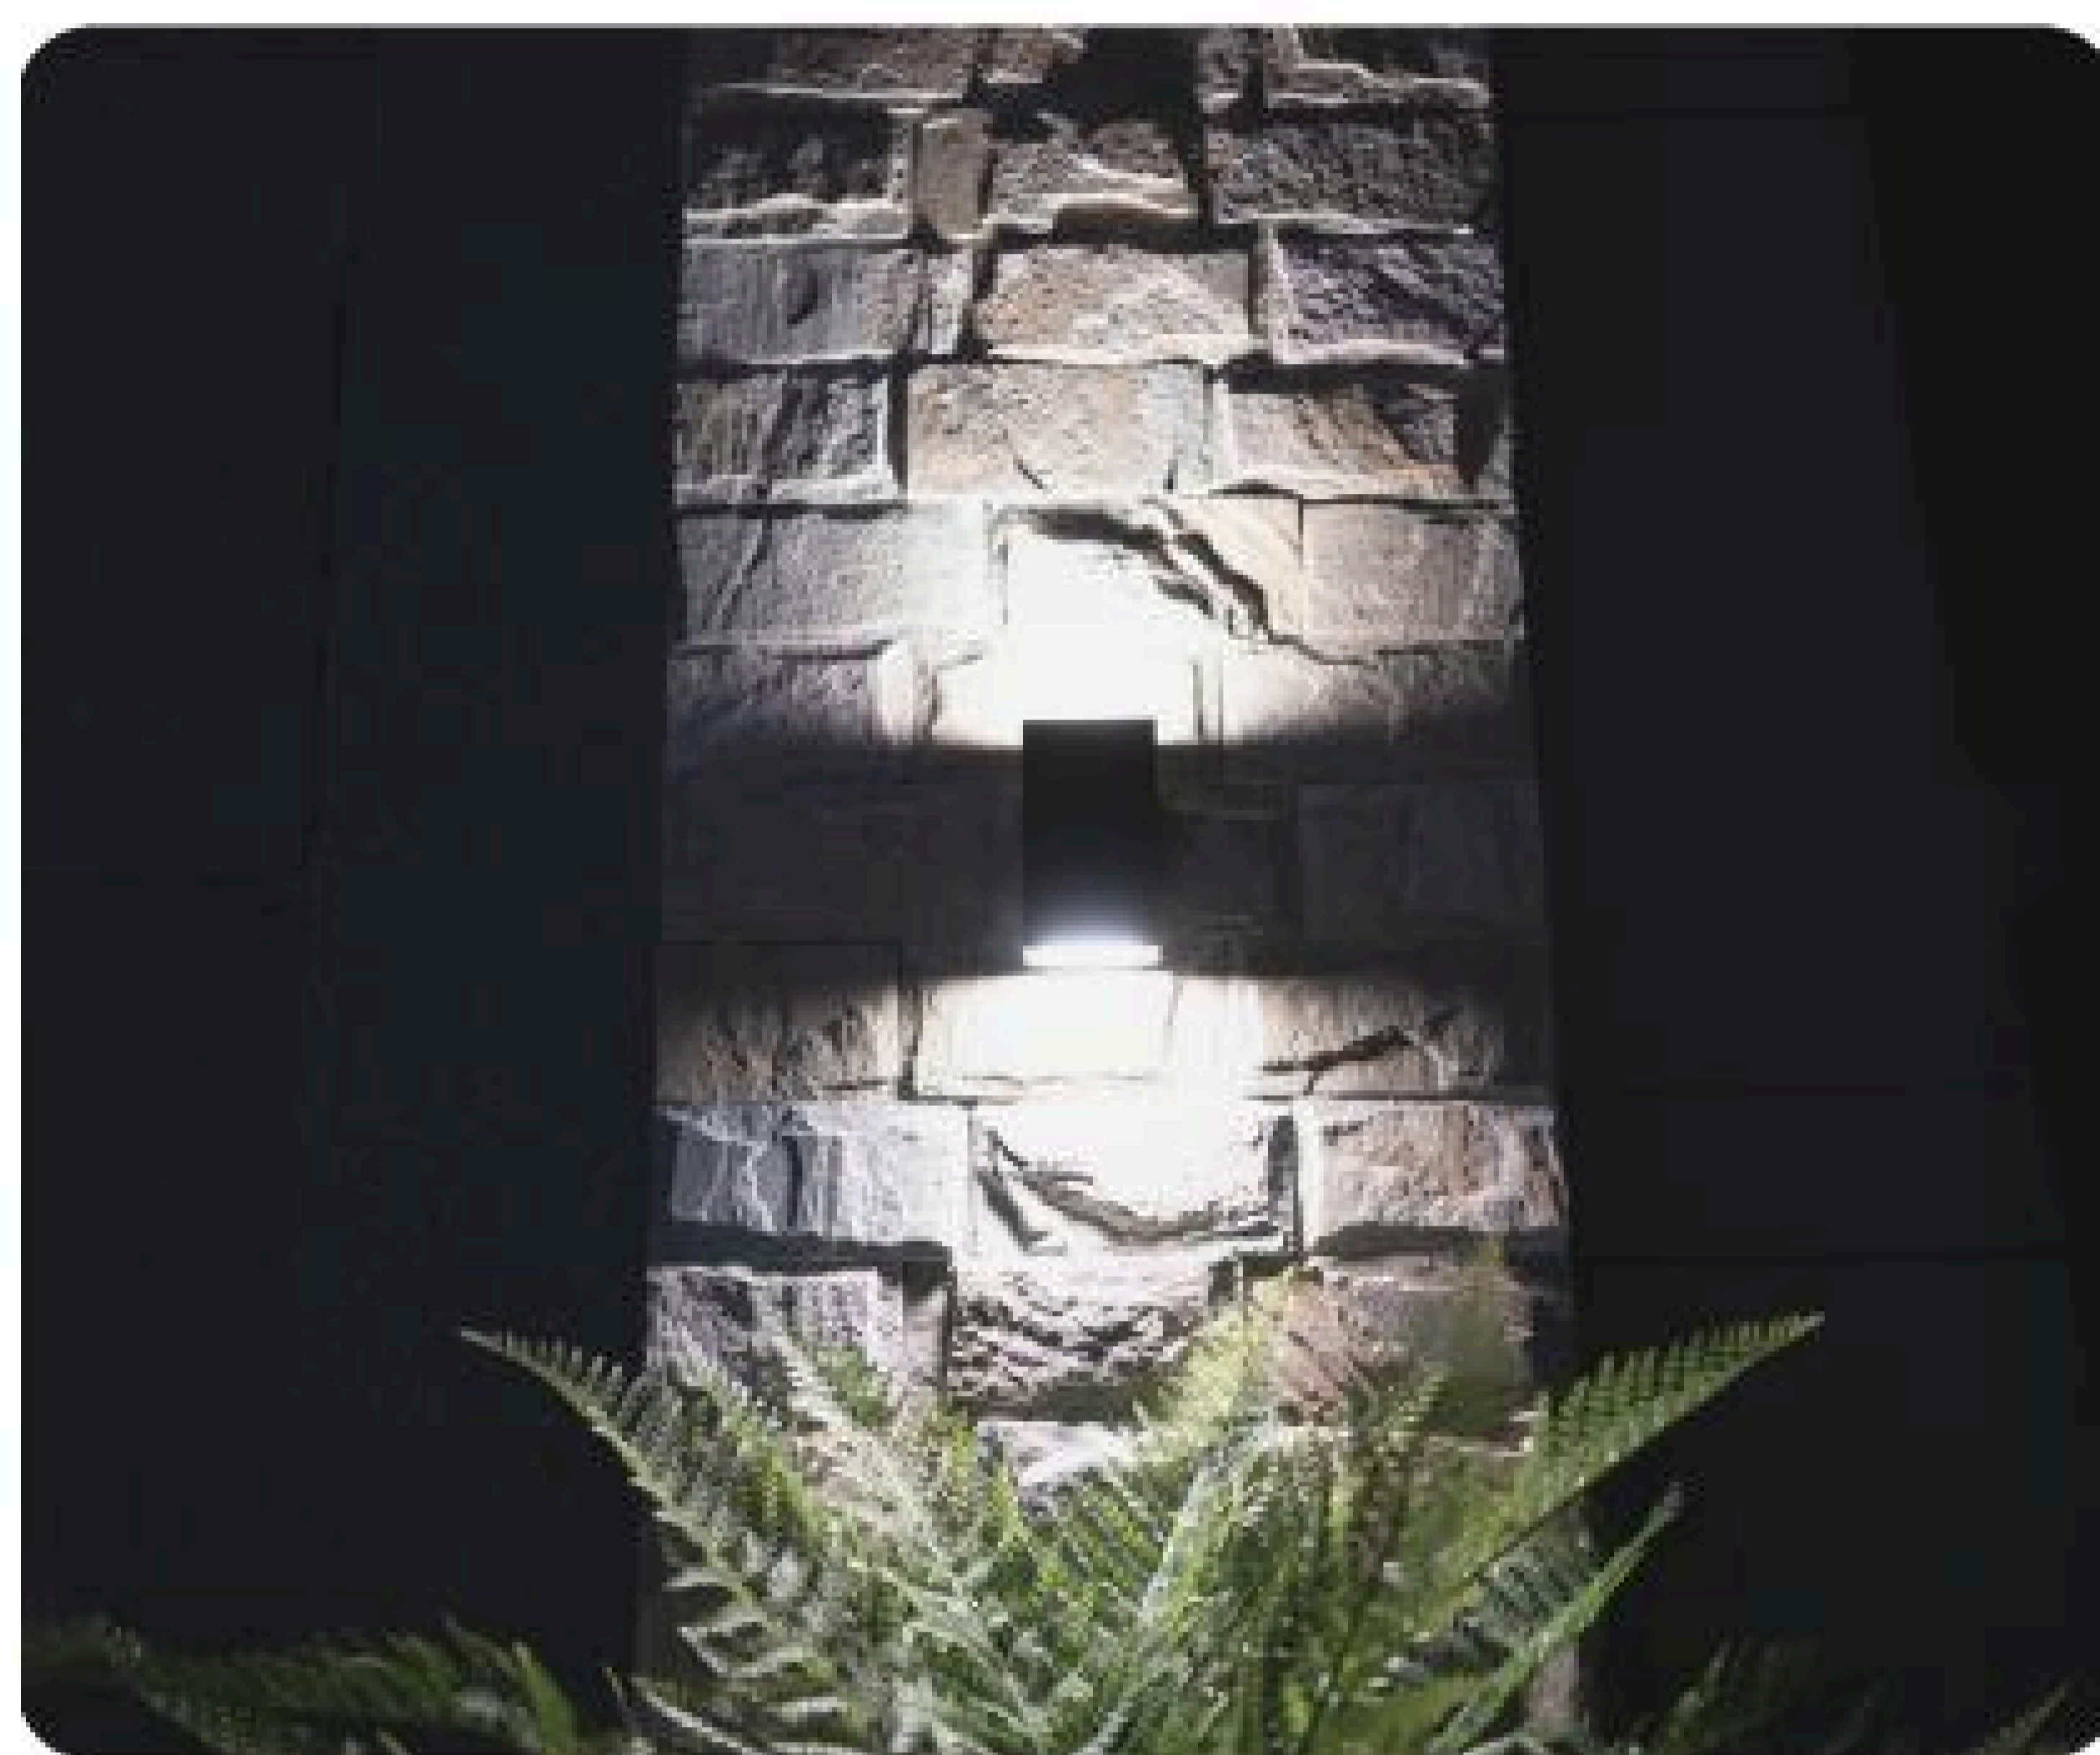

Painting Color


Primary



Secondary





Diagram of Instruction

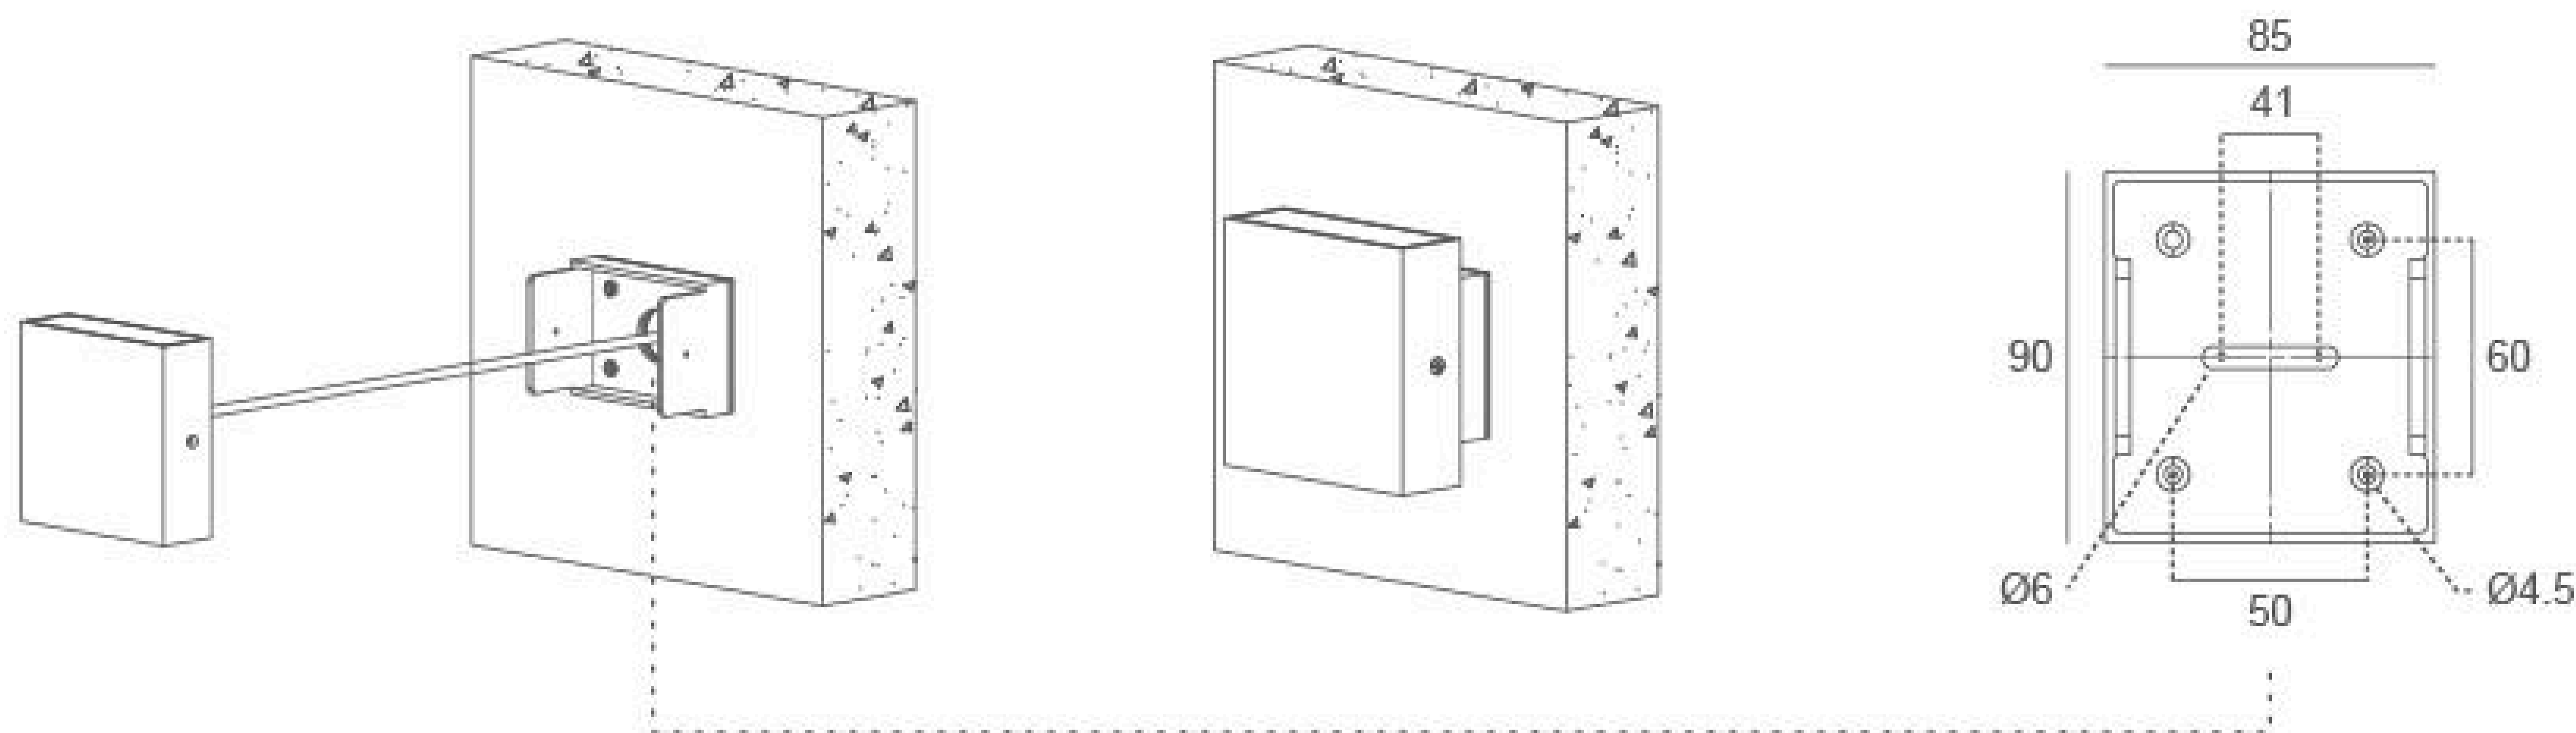

Photometric

12m	0.82 LUX
11m	
10m	1.18 LUX
9m	
8m	1.84 LUX
7m	
6m	3.27 LUX
5m	
4m	7.35 LUX
3m	
2m	29.41 LUX
1m	

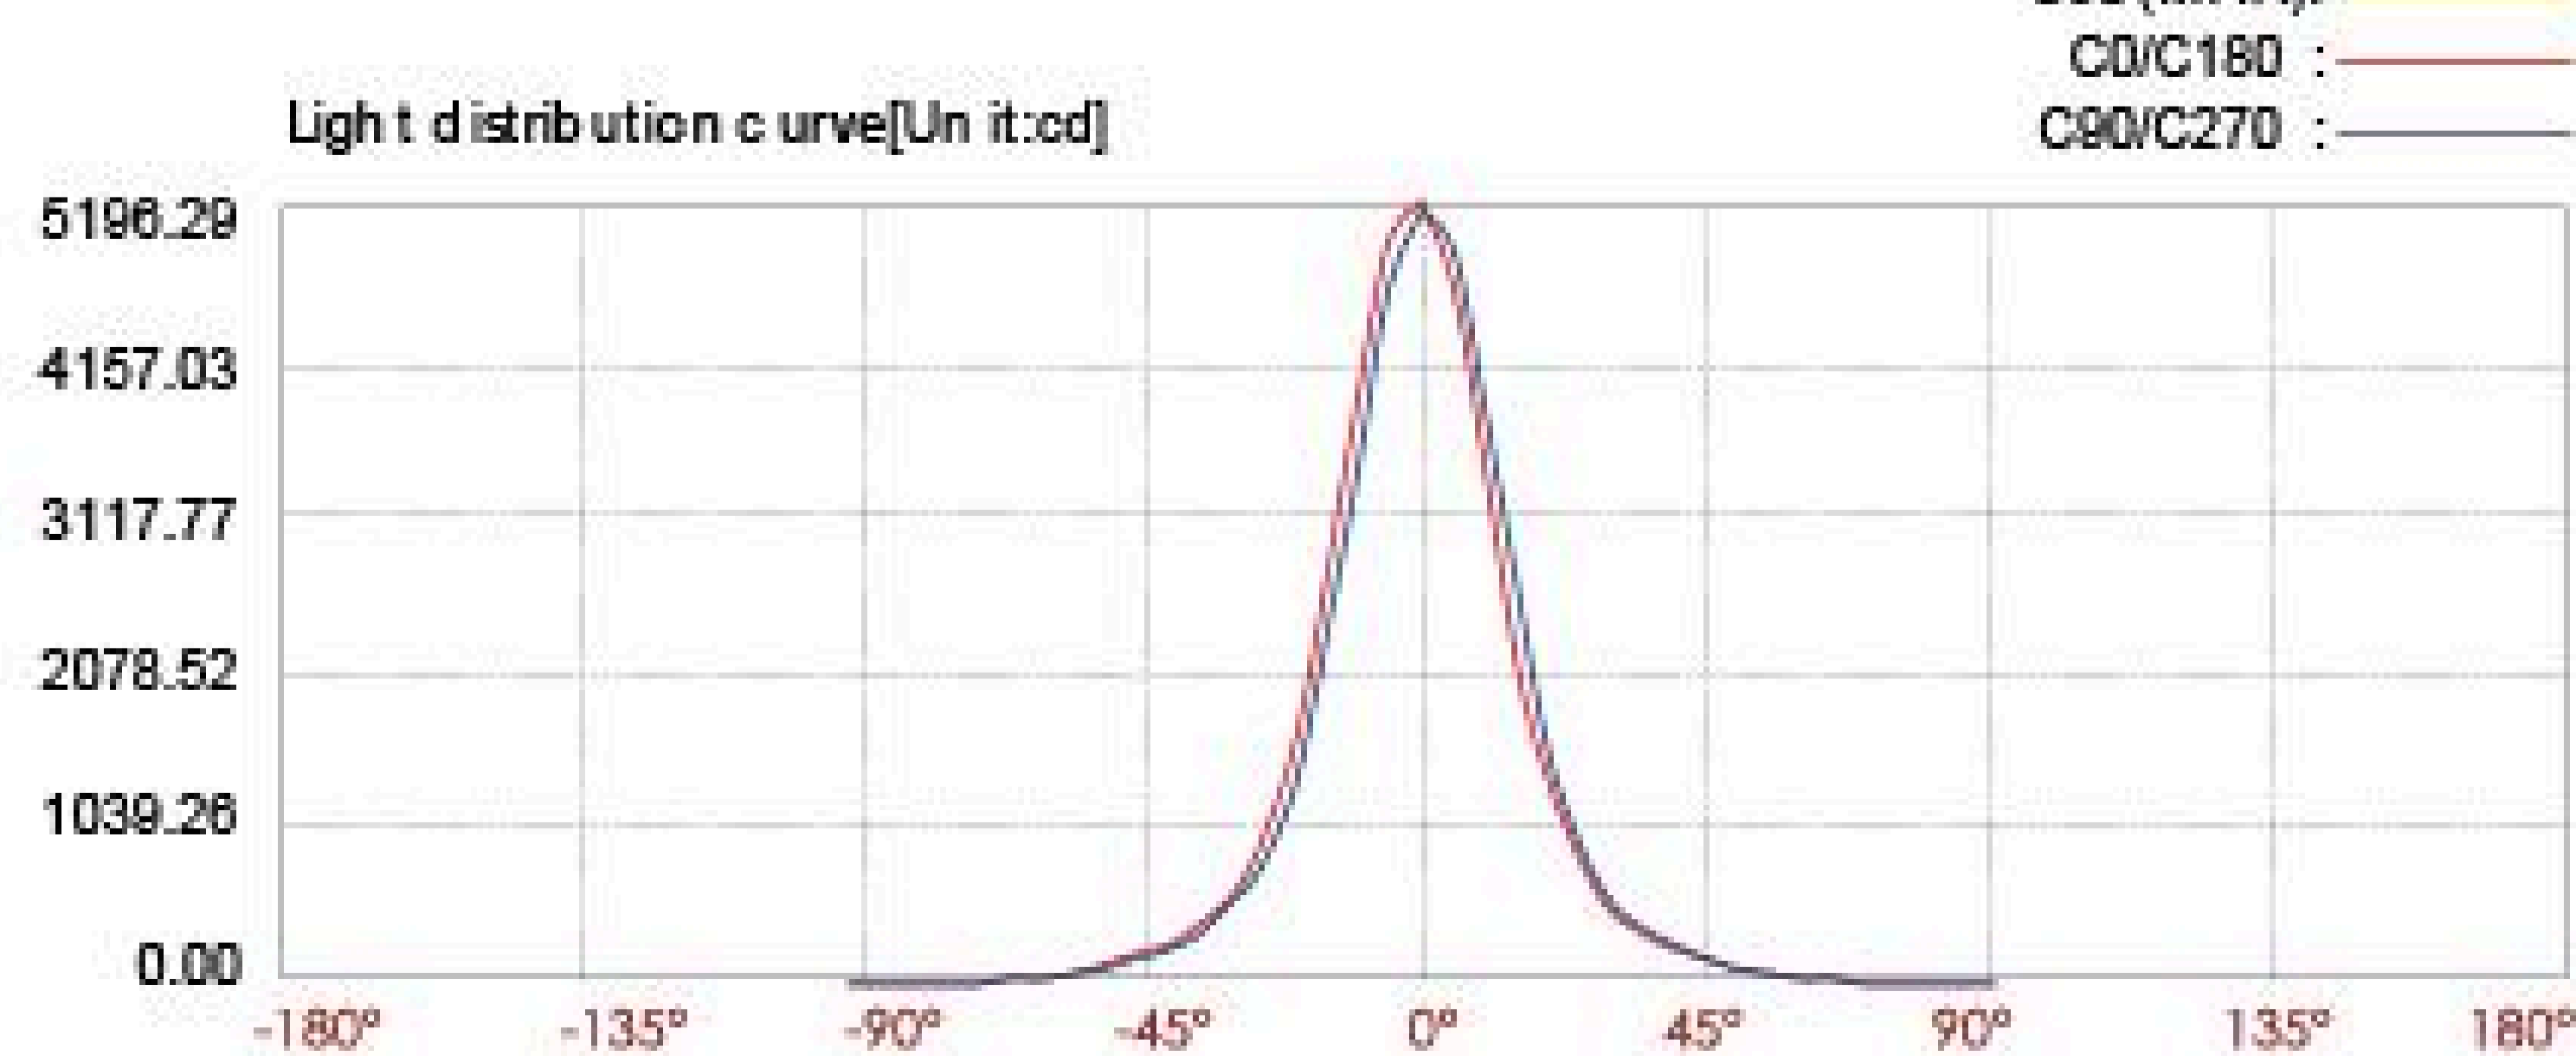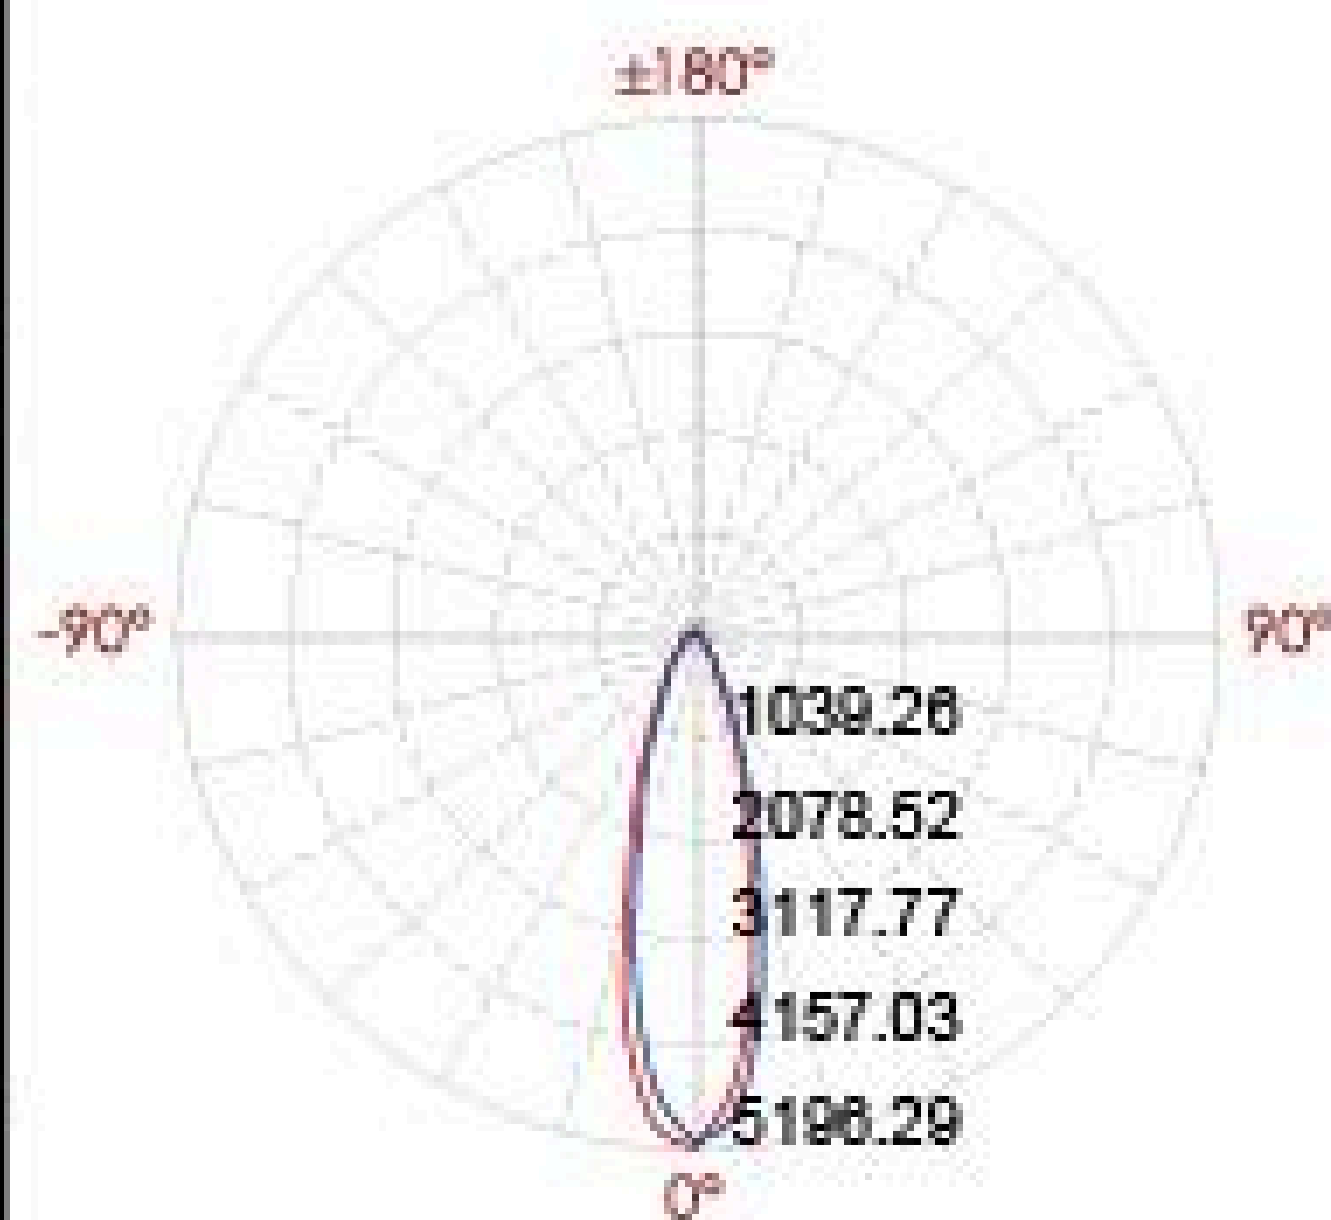

Center beam LUX	Beam width V	H
29.41 LUX	3.4m	2.1m
7.35 LUX	6.8m	4.3m
3.27 LUX	10.1m	6.4m
1.84 LUX	13.5m	8.5m
1.18 LUX	16.9m	10.6m
0.82 LUX	20.3m	12.8m

Ver. Spread: 80.4° Horiz. Spread: 56.1°